

Micro valve - Tube/Parallel male thread - RPS PG



BSP male thread

G 1/8

For tube OD (mm)

6

Operating pressure

0 to 10 bar

Temperature

0°C to + 60°C


Construction

Polymer and nickel-plated
brass

Description

Reference	BSP male thread	For tube OD (mm)
RPS PG0600	G 1/8	6
RPS PG0601	G 1/4	6
RPS PG0602	G 3/8	6
RPS PG0800	G 1/8	8
RPS PG0801	G 1/4	8

Reference	BSP male thread	For tube OD (mm)
RPS PG0802	G 3/8	8
RPS PG1001	G 1/4	10
RPS PG1002	G 3/8	10
RPS PG1003	G 1/2	10
RPS PG1201	G 1/4	12
RPS PG1202	G 3/8	12
RPS PG1203	G 1/2	12

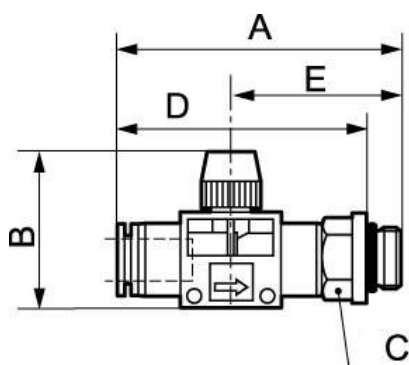

Dimensions

Reference	A mm	B mm	C mm	D mm	E mm
RPS PG0600	58	40.3	14	52.5	32.5
RPS PG0601	58	40.3	14	52	32.5
RPS PG0602	59.5	40.3	17	53	34
RPS PG0800	58.3	40.3	14	52.8	32.5
RPS PG0801	58.3	40.3	14	52.3	32.5
RPS PG0802	59.8	40.3	17	53.3	34
RPS PG1001	70.1	44.5	17	64.1	39
RPS PG1002	69.6	44.5	17	63.1	38.5
RPS PG1003	71.1	44.5	21	63.1	40
RPS PG1201	70.8	44.5	17	64.8	39
RPS PG1202	70.3	44.5	17	63.8	38.5
RPS PG1203	71.8	44.5	21	63.8	40