

Micro valve - Parallel male thread/Tube - RPS TG



BSP male thread

G 1/8

For tube OD (mm)

6

Operating pressure

0 to 10 bar

Temperature

0°C to + 60°C


Construction

Polymer and nickel-plated
brass

Description

Reference	BSP male thread	For tube OD (mm)
RPS TG0600	G 1/8	6
RPS TG0601	G 1/4	6
RPS TG0602	G 3/8	6
RPS TG0800	G 1/8	8

Reference	BSPB male thread	For tube OD (mm)
RPS TG0801	G 1/4	8
RPS TG0802	G 3/8	8
RPS TG1001	G 1/4	10
RPS TG1002	G 3/8	10
RPS TG1003	G 1/2	10
RPS TG1201	G 1/4	12
RPS TG1202	G 3/8	12
RPS TG1203	G 1/2	12

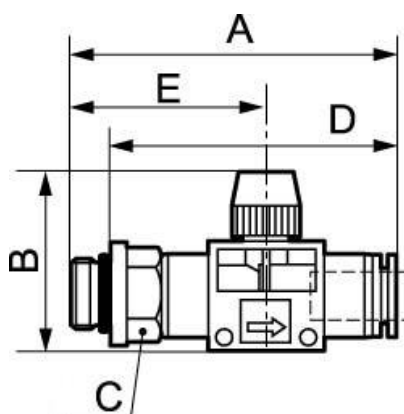

Dimensions

Reference	A mm	B mm	C mm	D mm	E mm
RPS TG0600	58	40.3	14	52.5	32.5
RPS TG0601	58	40.3	14	52	32.5
RPS TG0602	59.5	40.3	17	53	34
RPS TG0800	58.3	40.3	14	52.8	32.5
RPS TG0801	58.3	40.3	14	52.3	32.5
RPS TG0802	59.8	40.3	17	53.3	34
RPS TG1001	70.1	44.5	17	64.1	39
RPS TG1002	69.6	44.5	17	63.1	38.5
RPS TG1003	71.1	44.5	21	63.1	40
RPS TG1201	70.8	44.5	17	64.8	39
RPS TG1202	70.3	44.5	17	63.8	38.5
RPS TG1203	71.8	44.5	21	63.8	40