

## Tee with parallel male centre leg - RPT CG



### Metric male thread

M5

### For tube OD (mm)

4

### Operating pressure

0 to 10 bar

### Temperature


0°C to + 60°C

### Construction

Polymer and nickel-plated  
brass

## Description

| Reference         | Metric male thread | For tube OD (mm) |
|-------------------|--------------------|------------------|
| <b>RPT CG04M5</b> | M5                 | 4                |
| <b>RPT CG05M5</b> | M5                 | 5                |
| <b>RPT CG06M5</b> | M5                 | 6                |

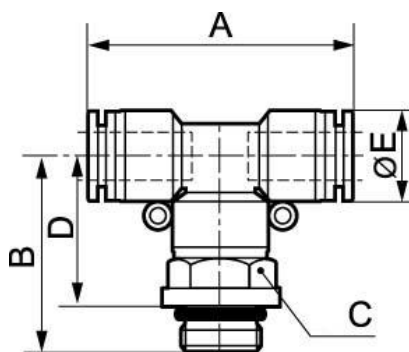

### Dimensions

| Reference         | A mm | B mm | C mm | D mm | E mm |
|-------------------|------|------|------|------|------|
| <b>RPT CG04M5</b> | 35   | 25   | 10   | 21   | 10   |
| <b>RPT CG05M5</b> | 41   | 27.5 | 12   | 23.5 | 12.8 |
| <b>RPT CG06M5</b> | 41   | 27.5 | 12   | 23.5 | 12.8 |