

Tapered male regulator with adjusting screw - Cylinder supply - RPV IR



BSPT male thread

R 1/8

For tube OD (mm)

4

Operating pressure

0 to 10 bar

Temperature

0°C to + 60°C


Construction

Polymer and nickel-plated
brass

Description

Reference	BSPT male thread	For tube OD (mm)
RPV IR0400	R 1/8	4
RPV IR0401	R 1/4	4
RPV IR0600	R 1/8	6
RPV IR0601	R 1/4	6
RPV IR0602	R 3/8	6
RPV IR0603	R 1/2	6

Reference	BSPT male thread	For tube OD (mm)
RPV IR0800	R 1/8	8
RPV IR0801	R 1/4	8
RPV IR0802	R 3/8	8
RPV IR0803	R 1/2	8
RPV IR1000	R 1/8	10
RPV IR1001	R 1/4	10
RPV IR1002	R 3/8	10
RPV IR1003	R 1/2	10
RPV IR1201	R 1/4	12
RPV IR1202	R 3/8	12
RPV IR1203	R 1/2	12

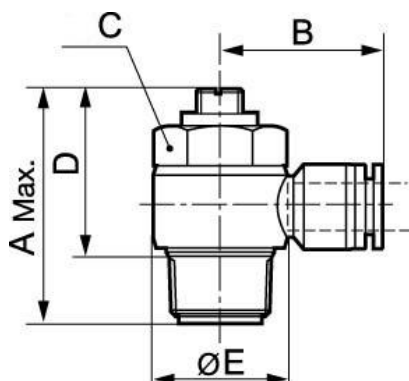

Dimensions

Reference	A mm	B mm	D mm	E mm
RPV IR0400	1.299			
RPV IR0401	1.614	0.945	1.26	
RPV IR0600	1.299	0.906		
RPV IR0601	1.614	1.26		
RPV IR0602	2.047	1.614	0.866	
RPV IR0603	2.244	1.732		
RPV IR0800	1.299			
RPV IR0801	1.614	1.26		
RPV IR0802	2.047	1.614	0.866	
RPV IR0803	2.244	1.732		
RPV IR1000	1.299			
RPV IR1001	1.614	1.22	1.26	
RPV IR1002	2.047	1.22	1.614	0.866
RPV IR1003	2.244	1.339	1.732	
RPV IR1201	1.614	1.26		
RPV IR1202	2.047	1.339	1.614	0.866

Reference	A mm	B mm	D mm	E mm
RPV IR1203	2.244	1.732		