

Parallel male regulator with adjusting screw - Cylinder exhaust - RPV OG



BSPB male thread

G 1/8

For tube OD (mm)

4

Operating pressure

0 to 10 bar

Temperature

0°C to + 60°C


Construction

Polymer and nickel-plated
brass

Description

Reference	BSPB male thread	For tube OD (mm)
RPV OG0400	G 1/8	4
RPV OG0401	G 1/4	4
RPV OG0600	G 1/8	6
RPV OG0601	G 1/4	6
RPV OG0602	G 3/8	6

Reference	BSP male thread	For tube OD (mm)
RPV OG0603	G 1/2	6
RPV OG0800	G 1/8	8
RPV OG0801	G 1/4	8
RPV OG0802	G 3/8	8
RPV OG0803	G 1/2	8
RPV OG1000	G 1/8	10
RPV OG1001	G 1/4	10
RPV OG1002	G 3/8	10
RPV OG1003	G 1/2	10
RPV OG1201	G 1/4	12
RPV OG1202	G 3/8	12
RPV OG1203	G 1/2	12

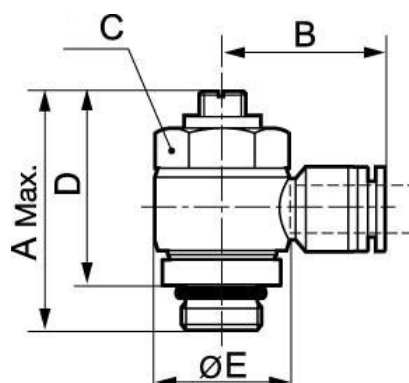

Dimensions

Reference	A mm	B mm	C mm	D mm	E mm
RPV OG0400	33	21.8	10	27.5	14.5
RPV OG0401	40	24	14	34	18.2
RPV OG0600	33	23	10	27.5	14.5
RPV OG0601	40	25.5	14	34	18.2
RPV OG0602	51	27.1	19	44.5	22
RPV OG0603	55.5	30.1	24	47.5	27.4
RPV OG0800	33	24.6	10	27.5	14.5
RPV OG0801	40	26.8	14	34	18.2
RPV OG0802	51	28.8	19	44.5	22
RPV OG0803	55.5	30.5	24	47.5	27.4
RPV OG1000	33	28.5	10	27.5	14.5
RPV OG1001	40	31	14	34	18.2
RPV OG1002	51	31	19	44.5	22
RPV OG1003	55.5	34	24	47.5	27.4
RPV OG1201	40	31.8	14	34	18.2

Reference	A mm	B mm	C mm	D mm	E mm
RPV OG1202	51	34	19	44.5	22
RPV OG1203	55.5	35.8	24	47.5	27.4