

Y with parallel male centre leg - RPY MG



BSPP male thread

G 1/8

For tube OD (mm)

4

Operating pressure

0 to 10 bar

Temperature

0°C to + 60°C


Construction

Polymer and nickel-plated
brass

Description

Reference	BSPP male thread	For tube OD (mm)
RPY MG0400	G 1/8	4
RPY MG0401	G 1/4	4
RPY MG0500	G 1/8	5
RPY MG0501	G 1/4	5
RPY MG0502	G 3/8	5
RPY MG0503	G 1/2	5
RPY MG0600	G 1/8	6
RPY MG0601	G 1/4	6
RPY MG0602	G 3/8	6

Reference	BSPP male thread	For tube OD (mm)
RPY MG0603	G 1/2	6
RPY MG0800	G 1/8	8
RPY MG0801	G 1/4	8
RPY MG0802	G 3/8	8
RPY MG0803	G 1/2	8
RPY MG1000	G 1/8	10
RPY MG1001	G 1/4	10
RPY MG1002	G 3/8	10
RPY MG1003	G 1/2	10
RPY MG1201	G 1/4	12
RPY MG1202	G 3/8	12
RPY MG1203	G 1/2	12
RPY MG1402	G 3/8	14
RPY MG1403	G 1/2	14
RPY MG1602	G 3/8	16
RPY MG1603	G 1/2	16

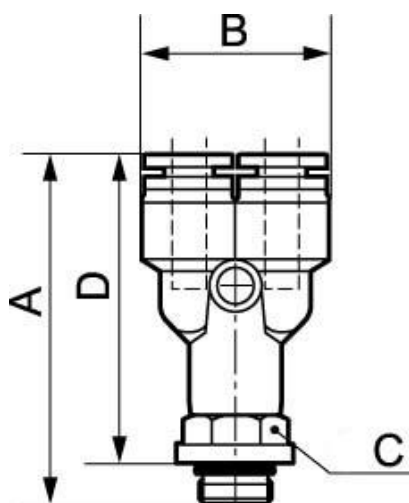

Dimensions				
Reference	A mm	B mm	C mm	D mm
RPY MG0400	40.5	20	12	33
RPY MG0401	41	20	14	32
RPY MG0500	43.5	25.6	12	36
RPY MG0501	44	25.6	14	35
RPY MG0502	45.5	25.6	17	34.5
RPY MG0503	46.5	25.6	21	33.5
RPY MG0600	43.5	25.6	12	36
RPY MG0601	44	25.6	14	35
RPY MG0602	45.5	25.6	17	34.5
RPY MG0603	46.5	25.6	21	33.5
RPY MG0800	45.3	27.6	14	37.8
RPY MG0801	45.3	27.6	14	36.3
RPY MG0802	46.8	27.6	17	35.8
RPY MG0803	47.8	27.6	21	34.8
RPY MG1000	57.3	33.6	17	49.8
RPY MG1001	57.8	33.6	17	48.8
RPY MG1002	57.8	32.6	17	46.8

Reference	A mm	B mm	C mm	D mm
RPY MG1003	58.8	33.6	21	45.8
RPY MG1201	60.5	39.6	19	51.5
RPY MG1202	60	39.6	19	49
RPY MG1203	61.5	39.6	21	48.5
RPY MG1402	61.6	45.4	22	50.6
RPY MG1403	63.5	45.4	24	50.5
RPY MG1602	64.3	47.6	24	53.3
RPY MG1603	61.8	47.6	24	48.8