


ALTO 1 - 2-piece-set - Filter-Regulator-Lubricator (gauge included)
with wall bracket, diverter block, and 2 prevoS1 safety quick
coupler

1941_TB_SME1ES_montage_PREVOST-800px.tif

<u>Female thread (BSPP)</u> G 1/4	<u>Flow rate (l/min at 7 bar ΔP)</u> 1 bar) = 500	<u>Max operating pressure (bar)</u> 12	<u>Filtration (µm)</u> 25
<u>Temperature</u> +5°C to +50 °C	<u>Construction</u> Body : Aluminium Polycarbonate bowl with metallic protection	<u>Equipped with</u> Manual drain	

Description				
Reference	Female thread (BSPP)	Flow rate (l/min at 7 bar ΔP)	Max operating pressure (bar)	Filtration (µm)
TB SME1ES	G 1/4	1 bar) = 500	12	25

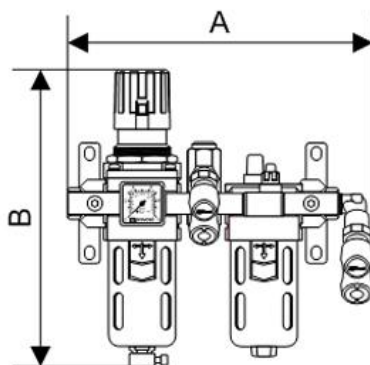

Dimensions

Reference	A mm	B mm
TB SME1ES	195	169