

## Complete portable kit for 12/20 kg grease drums



### Includes

- pump for 12/20 kg drum -  
tube length: 410 mm -  
cover + sealing diaphragm -  
distribution gun - 4 m  
rubber hose - carrying  
handle

### Technology

Piston dual action

### Operating pressure

3 to 7 bar

### Outlet pressure

406 bar (air pressure at 7  
bar)

### Flow rate

900 g/min (for air pressure  
6 bar)

### BSPP female thread

Air inlet : G 1/4

### Pressure ratio


58:1

### BSPP male thread

Grease outlet : G 1/4

## Description

Reference	Includes
<b>EPG KR20</b>	- pump for 12/20 kg drum - tube length: 410 mm - cover + sealing diaphragm - distribution gun - 4 m rubber hose - carrying handle
<b>EPG KRF20</b>	Complete portable kit for 12/20 kg grease drums with FRL
<b>EPG KRFC20</b>	Complete portable kit for 12/20 kg grease drums with FRL and transport cart

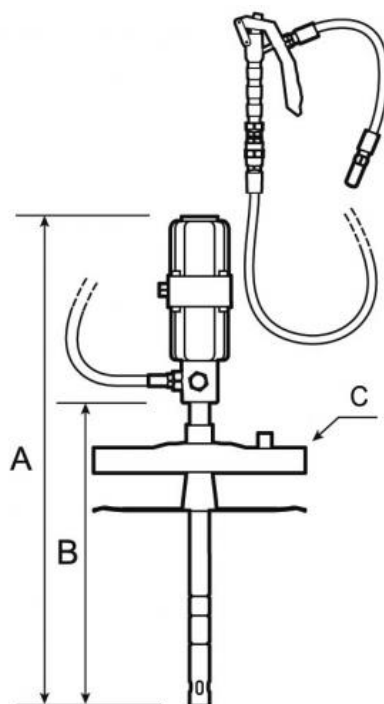

Dimensions			
Reference	A mm	B mm	C mm
<b>EPG KR20</b>	680	410	280
<b>EPG KRF20</b>	680	410	280
<b>EPG KRFC20</b>	680	410	280