

Complete portable kit for 20/30 kg grease drums



Includes

- pump for 20/30 kg drum -
tube length: 470 mm - cover
+ sealing diaphragm -
distribution gun - 6 m rubber
hose

Technology

Piston dual action

Operating pressure

3 to 7 bar

Outlet pressure

406 bar (air pressure at 7
bar)

Flow rate

900 g/min (for air pressure 6
bar)

BSPP female thread

Air inlet : G 1/4

Pressure ratio


58:1

BSPP male thread

Grease outlet : G 1/4

Description

Reference	Includes
EPG KR30	- pump for 20/30 kg drum - tube length: 470 mm - cover + sealing diaphragm - distribution gun - 6 m rubber hose
EPG KRF30	Complete portable kit for 20/30 kg grease drums with FRL
EPG KRFC30	Complete kit for 20/30 kg grease drums with FRL and transport cart

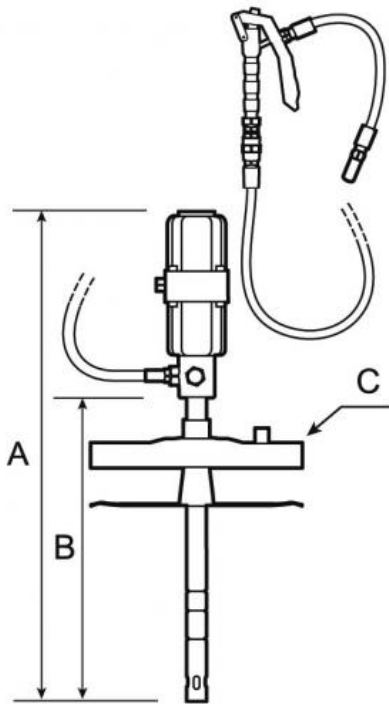

Dimensions			
Reference	A mm	B mm	C mm
EPG KR30	740	470	320
EPG KRF30	740	470	320
EPG KRFC30	740	470	320