

Complete portable kit for 50/60 kg grease drums



Includes

- pump for 50/60 kg drum - tube length: 730 mm - cover + sealing diaphragm - distribution gun - 6 m rubber hose

Outlet pressure

406 bar (air pressure at 7 bar)

Pressure ratio

58:1

Technology

Piston dual action

Flow rate

900 g/min (for air pressure 6 bar)

BSPP male thread

Grease outlet : G 1/4

Operating pressure


3 to 7 bar

BSPP female thread

Air inlet : G 1/4

Description

Reference	Includes
EPG KR60	- pump for 50/60 kg drum - tube length: 730 mm - cover + sealing diaphragm - distribution gun - 6 m rubber hose
EPG KRF60	Complete portable kit for 50/60 kg grease drums with FRL
EPG KRFC60	Complete kit for 50/60 kg grease drums with FRL and transport cart

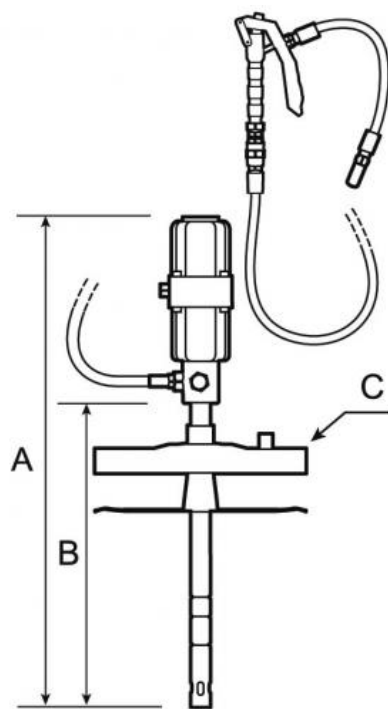

Dimensions			
Reference	A mm	B mm	C mm
EPG KR60	1000	730	340 - 380
EPG KRF60	1000	730	340-380
EPG KRFC60	680	410	280