

## Female thread swivel coupler



### BSPP female thread

G 3/8

### Technology

Safety (avoid hose whip)

### Operating pressure

0 to 16 bar

### Flow rate at 6 bar

833 l/min (?P = 0,6 bar)

### ID Passage

6 mm

### Temperature

-15°C to +70°C

### Construction

Body : Stainless steel

### Highlight

Anti-static


## Description

Reference

**CSM 061102SW**

BSPP female thread

G 3/8

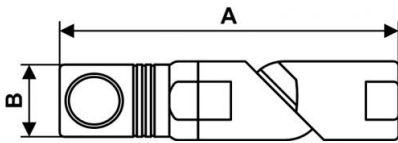

Dimensions		
Reference	A mm	B mm
CSM 061102SW	103	24