

Tapered male thread coupling



BSPP male thread

G 1/4

Technology

Safety (avoid hose whip)

Operating pressure

0 to 16 bar

Flow rate at 6 bar

833 l/min ($\Delta P = 0,6$ bar)

ID Passage

6 mm

Temperature

-15°C to +70°C

Construction

Body : Stainless steel

Highlight

Anti-static

Description

Reference

BSPP male thread

CSM 061151


G 1/4

CSM 061152

G 3/8

CSM 061153

G 1/2

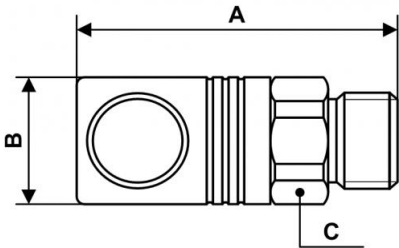

Dimensions			
Reference	A mm	B mm	C mm
CSM 061151	54.5	22	20
CSM 061152	55.5	22	20
CSM 061153	57.5	22	23