

Tapered female thread coupler



BSPP female thread

G 1/4

Technology

Safety (avoid hose whip)

Operating pressure

2 to 16 bar

Flow rate at 6 bar

2120 l/min (?P = 0,6 bar)

ID Passage

8 mm

Temperature

-15°C to +70°C

Construction


Body : Stainless steel

Highlight

Anti-static

Description

Reference	BSPP female thread
CSM 081101	G 1/4
CSM 081102	G 3/8
CSM 081103	G 1/2

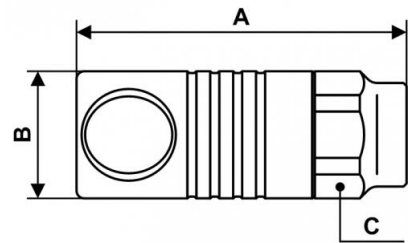

Dimensions			
Reference	A mm	B mm	C mm
CSM 081101	68.5	27	25
CSM 081102	69.5	27	25
CSM 081103	74.5	27	25