

Tapered male thread coupling



BSPP male thread

G 1/4

Technology

Safety (avoid hose whip)

Operating pressure

2 to 16 bar

Flow rate at 6 bar

2120 l/min (?P = 0,6 bar)

ID Passage

8 mm

Temperature

-15°C to +70°C

Construction

Body : Stainless steel

Highlight

Anti-static

Description

Reference

BSPP male thread

CSM 081151


G 1/4

CSM 081152

G 3/8

CSM 081153

G 1/2

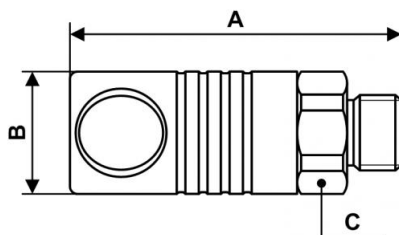

Dimensions			
Reference	A mm	B mm	C mm
CSM 081151	72	27	25
CSM 081152	73	27	25
CSM 081153	75	27	25