


Tapered male thread coupling



<u>BSPB male thread</u> G 3/8	<u>Technology</u> Safety (avoid hose whip)	<u>Operating pressure</u> 2 to 16 bar	<u>Flow rate at 6 bar</u> 4120 l/min ($\Delta P = 0,6$ bar)
<u>ID Passage</u> 11 mm	<u>Temperature</u> -15°C to +70°C	<u>Construction</u> Body : Stainless steel	<u>Highlight</u> Anti-static

Description	
Reference	BSPB male thread
CSM 111152	G 3/8
CSM 111153	G 1/2
CSM 111154	G 3/4

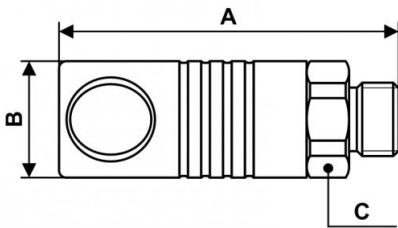

Dimensions			
Reference	A mm	B mm	C mm
CSM 111152	94	33	30
CSM 111153	96	33	30
CSM 111154	98	33	30