

Parallel male straight stud - RMD MG



BSPB male thread

G 1/8

For tube OD (mm)

4

Operating pressure

0 to 15 bar

Temperature

-20°C to +80°C


Construction

Nickel-plated brass

Description

Reference	BSPB male thread	For tube OD (mm)
RMD MG0400	G 1/8	4
RMD MG0401	G 1/4	4
RMD MG0600	G 1/8	6
RMD MG0601	G 1/4	6
RMD MG0800	G 1/8	8
RMD MG0801	G 1/4	8
RMD MG0802	G 3/8	8

Reference	BSPB male thread	For tube OD (mm)
RMD MG1001	G 1/4	10
RMD MG1002	G 3/8	10
RMD MG1003	G 1/2	10
RMD MG1201	G 1/4	12
RMD MG1202	G 3/8	12
RMD MG1203	G 1/2	12
RMD MG1402	G 3/8	14
RMD MG1403	G 1/2	14

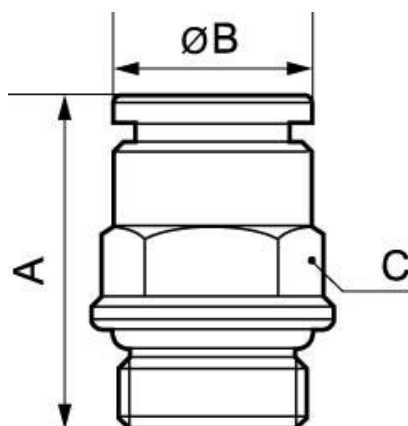

Dimensions			
Reference	A mm	B mm	C mm
RMD MG0400	20.5	9.8	11
RMD MG0401	22.3	9.8	12
RMD MG0600	27.4	11.6	13
RMD MG0601	26.8	11.6	13
RMD MG0800	28.5	13.5	14
RMD MG0801	27	13.5	15
RMD MG0802	28	13.5	15
RMD MG1001	33.5	15.6	17
RMD MG1002	30.5	15.6	17
RMD MG1003	31.5	15.6	17
RMD MG1201	34.5	17.8	19
RMD MG1202	36	17.8	19
RMD MG1203	33.5	17.8	21
RMD MG1402	38	19.8	23
RMD MG1403	39.5	19.8	23