

## Hose tail coupler



**For hose ID (mm)**

10

**Technology**

Safety (avoid hose whip)

**Operating pressure**

2 to 16 bar

**Flow rate at 6 bar**

4120 l/min (?P = 0,6 bar)

**ID Passage**

11 mm

**Temperature**

-15°C to +70°C

**Construction**


Body : Stainless steel

**Highlight**

Anti-static

### Description

| Reference         | For hose ID (mm) |
|-------------------|------------------|
| <b>CSM 111810</b> | 10               |
| <b>CSM 111813</b> | 13               |
| <b>CSM 111816</b> | 16               |
| <b>CSM 111819</b> | 19               |

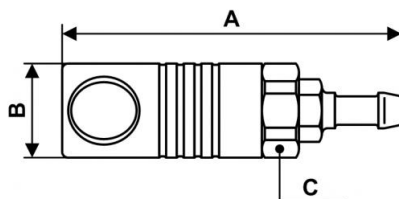

| Dimensions        |      |      |      |
|-------------------|------|------|------|
| Reference         | A mm | B mm | C mm |
| <b>CSM 111810</b> | 119  | 33   | 30   |
| <b>CSM 111813</b> | 112  | 33   | 30   |
| <b>CSM 111816</b> | 111  | 33   | 30   |
| <b>CSM 111819</b> | 147  | 33   | 30   |