

Swivel 90° tapered male elbow - RMC MR



BSPT male thread

R 1/8

For tube OD (mm)

4

Operating pressure

0 to 15 bar

Temperature

-20°C to +80°C


Construction

Nickel-plated brass

Description

Reference	BSPT male thread	For tube OD (mm)
RMC MR0400	R 1/8	4
RMC MR0401	R 1/4	4
RMC MR0600	R 1/8	6
RMC MR0601	R 1/4	6
RMC MR0800	R 1/8	8
RMC MR0801	R 1/4	8
RMC MR0802	R 3/8	8
RMC MR1001	R 1/4	10
RMC MR1002	R 3/8	10

Reference	BSPT male thread	For tube OD (mm)
RMC MR1202	R 3/8	12
RMC MR1203	R 1/2	12
RMC MR1403	R 1/2	14

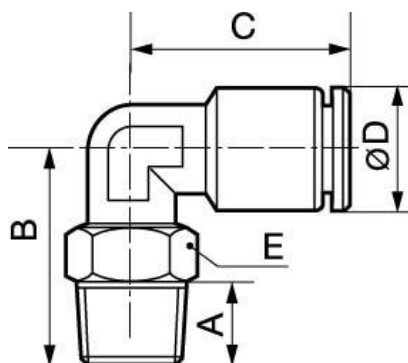

Dimensions

Reference	A mm	B mm	C mm	D mm	E mm
RMC MR0400	6.2	22	21	10	12
RMC MR0401	8.5	27	21	10	16
RMC MR0600	6.2	22	24	11.8	12
RMC MR0601	11	26	26	11.6	16
RMC MR0800	8	23	26	13.5	12
RMC MR0801	11	26	26	13.5	16
RMC MR0802	11	30	28	13.5	19
RMC MR1001	11	28	30	15.6	16
RMC MR1002	12	31	30	15.6	19
RMC MR1202	12	32	33	17.8	19
RMC MR1203	14	33	34.5	19	22
RMC MR1403	14	34.5	36	19.8	22