


90° fixed tapered male elbow - RMC XR

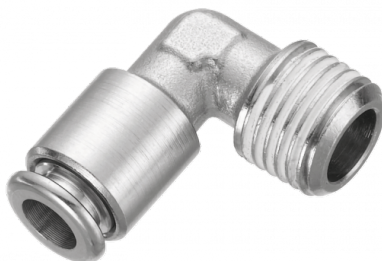

BSPT male thread

R 1/8

For tube OD (mm)

4

Operating pressure

0 to 15 bar

Temperature


-20°C to +80°C

Construction

Nickel-plated brass

Description

Reference	BSPT male thread	For tube OD (mm)
RMC XR0400	R 1/8	4
RMC XR0600	R 1/8	6
RMC XR0601	R 1/4	6
RMC XR0800	R 1/8	8
RMC XR0801	R 1/4	8
RMC XR1001	R 1/4	10

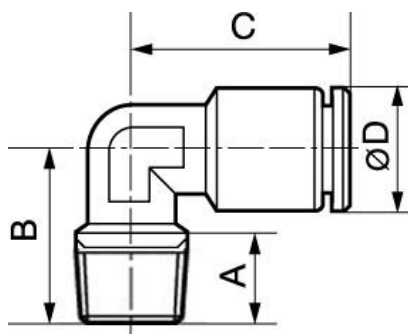

Dimensions				
Reference	A mm	B mm	C mm	D mm
RMC XR0400	6.2	16	21	9.5
RMC XR0600	8	16	24	11.6
RMC XR0601	10	18	23	11.6
RMC XR0800	8	17	26	13.5
RMC XR0801	8.5	20	26	14
RMC XR1001	8.5	22	30.5	14