

Swivel tapered male centre tee piece - RMT CR



BSPT male thread

R 1/8

For tube OD (mm)

4

Operating pressure

0 to 15 bar

Temperature

-20°C to +80°C


Construction

Nickel-plated brass

Description

Reference	BSPT male thread	For tube OD (mm)
RMT CR0400	R 1/8	4
RMT CR0401	R 1/4	4
RMT CR0600	R 1/8	6
RMT CR0601	R 1/4	6
RMT CR0800	R 1/8	8
RMT CR0801	R 1/4	8
RMT CR0802	R 3/8	8

Reference	BSPT male thread	For tube OD (mm)
RMT CR1001	R 1/4	10
RMT CR1002	R 3/8	10

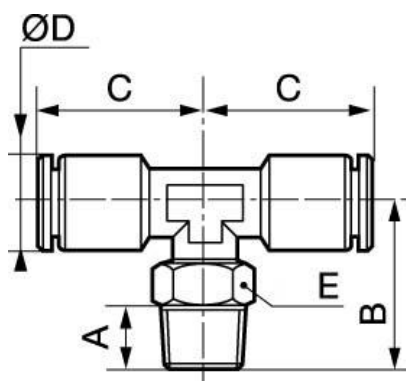

Dimensions

Reference	A mm	B mm	C mm	D mm	E mm
RMT CR0400	8	21.5	21	9.8	12
RMT CR0401	11	25	21	9.8	16
RMT CR0600	8	21.5	24	11.6	12
RMT CR0601	11	26	26	11.6	16
RMT CR0800	8	23	26	13.5	12
RMT CR0801	11	26	26	13.5	16
RMT CR0802	12	32	26	14	19
RMT CR1001	11	28.5	30.5	15.6	16
RMT CR1002	11	30.5	30.5	15.6	19