

Tapered parallel male thread twin coupler



BSPT male thread

R 1/4

Technology

Safety (avoid hose whip)

Operating pressure

0 to 16 bar

Flow rate at 6 bar

833 l/min (?P = 0,6 bar)

ID Passage

6 mm

Temperature

-15°C to +70°C

Construction

Body : Stainless steel

Highlight

Anti-static

Description

Reference

CSM 068151

CSM 068152


CSM 068153

BSPT male thread

R 1/4

R 3/8

R 1/2

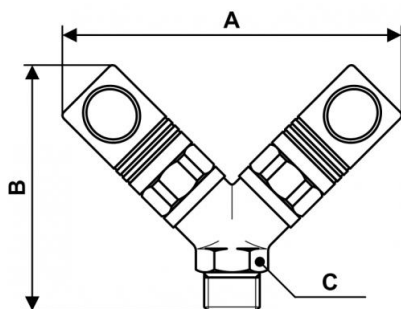

Dimensions			
Reference	A mm	B mm	C mm
CSM 068151	101	71	17
CSM 068152	104	75	20
CSM 068153	112	85	25