

## ALTO 2 - 2-piece-set - Filter-Regulator-Lubricator (gauge included) with wall bracket



### BSPP female thread

G 3/8

### Flow rate (l/min at 7 bar $\Delta P$ )

1bar) = 1250

### Max operating pressure (bar)

12

### Filtration ( $\mu m$ )

25

### Temperature

+5°C to +50 °C

### Construction

Body : Aluminium


Polycarbonate bowl with metallic protection

### Equipped with

Manual drain

## Description

Reference	BSPP female thread	Flow rate (l/min at 7 bar $\Delta P$ )	Max operating pressure (bar)	Filtration ( $\mu m$ )
<b>KTB SM2</b>	G 3/8	1bar) = 1250	12	25

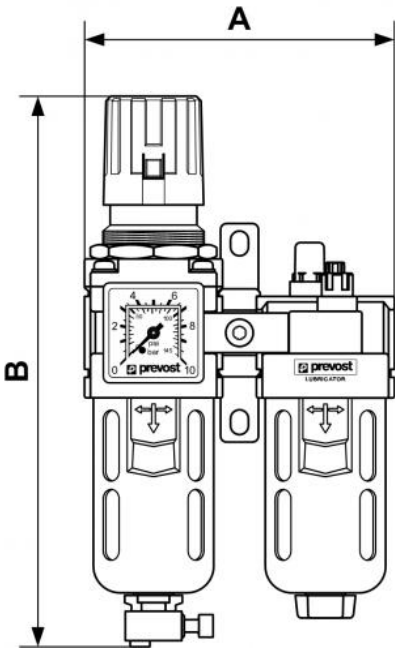

Dimensions		
Reference	A mm	B mm
KTB SM2	124	220