


## ALTO 2 - Filter-Regulator (gauge included) with wall bracket



<b><u>BSPP female thread</u></b> G 3/8	<b><u>Flow rate (l/min at 7 bar ?P)</u></b> 1bar) = 1800	<b><u>Max operating pressure (bar)</u></b> 12	<b><u>Filtration (µm)</u></b> 25
<b><u>Temperature</u></b> +5°C to +50 °C	<b><u>Construction</u></b> Body : Aluminium Polycarbonate bowl with metallic protection	<b><u>Equipped with</u></b> Manual drain	

Description				
Reference	BSPP female thread	Flow rate (l/min at 7 bar ?P	Max operating pressure (bar)	Filtration (µm)
<b>KTM SM2</b>	G 3/8	1bar) = 1800	12	25

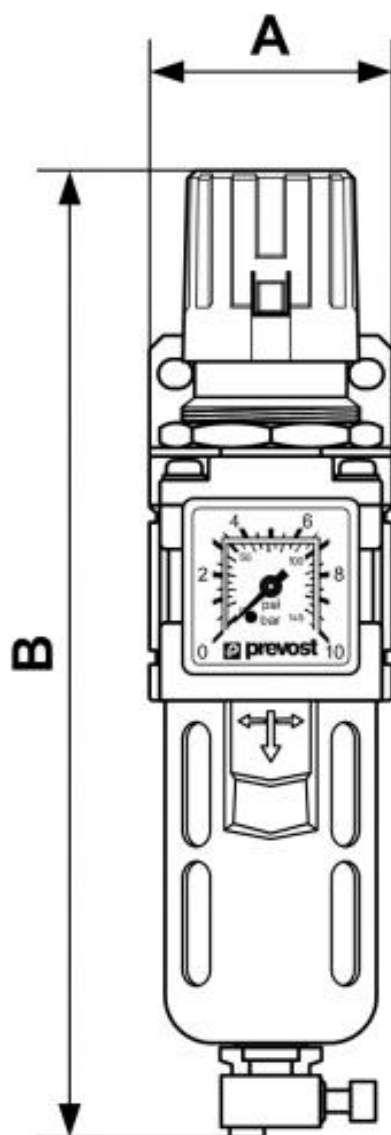

Dimensions		
Reference	A mm	B mm
<b>KTM SM2</b>	55	220