


Galvanised double wire clamps

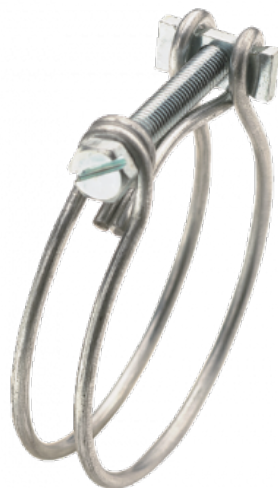

Ø min./max. (mm)

13 - 16

Dimensions (of the head
of the screw (mm))

8

Packaging

50

Construction

Zinc-plated steel

Description

Reference	Ø min./max. (mm)	Dimensions (of the head of the screw (mm))	Packaging
PF 1316	13 - 16	8	50
PF 1521	15 - 21	8	50
PF 2023	20 - 23	8	50
PF 2225	22 - 25	8	50
PF 2427	24 - 27	8	50
PF 2731	27 - 31	8	50
PF 3135	31 - 35	8	50
PF 3540	35 - 40	8	50

Reference	Ø min./max. (mm)	Dimensions (of the head of the screw (mm))	Packaging
PF 3843	38 - 43	8	50
PF 4348	43 - 48	8	50
PF 4550	45 - 50	8	50
PF 4955	49 - 55	8	50
PF 5460	54 - 60	8	50
PF 5965	59 - 65	8	50
PF 6470	64 - 70	8	25
PF 6975	69 - 75	8	25
PF 7380	73 - 80	8	25
PF 7885	78 - 85	8	25



Dimensions		
Reference	A mm	B mm
PF 1316	28.5	13
PF 1521	28.5	13
PF 2023	0.512	
PF 2225	0.512	
PF 2427	33.5	13
PF 2731	33.5	13
PF 3135	33.5	13
PF 3540	43.5	13
PF 3843	43.5	13
PF 4348	0.512	
PF 4550	43.5	13
PF 4955	43.5	13
PF 5460	43.5	13
PF 5965	43.5	13
PF 6470	43.5	13
PF 6975	43.5	13
PF 7380	43.5	13
PF 7885	0.512	