

ALTO 3 - Submicronic filter set with regulator and gauge and prevoS1 quick release quick coupler



BSPP female thread

G 1/2

Flow rate (l/min at 7 bar ΔP : 1bmax in l/min)

1500

Max operating pressure (bar)

12

Filtration (μm)

5 and 0.01

Equipped with 1 coupling

ESI 07

Temperature

+5°C to +50 °C

Construction

Body : Aluminium
Polycarbonate bowl with
metallic protection


Equipped with

Manual drain

Description

Reference	BSPP female thread	Flow rate (l/min at 7 bar ΔP : 1bmax in l/min)	Max operating pressure (bar)	Filtration (μm)	Equipped with 1 coupling
-----------	--------------------	---	---------------------------------	------------------------	-----------------------------

KTB CSM3BS	G 1/2	750	12	5 and 0.01	BSI 06
KTB CSM3ES	G 1/2	1500	12	5 and 0.01	ESI 07
KTB CSM3IS	G 1/2	833	12	5 and 0.01	ISI 06

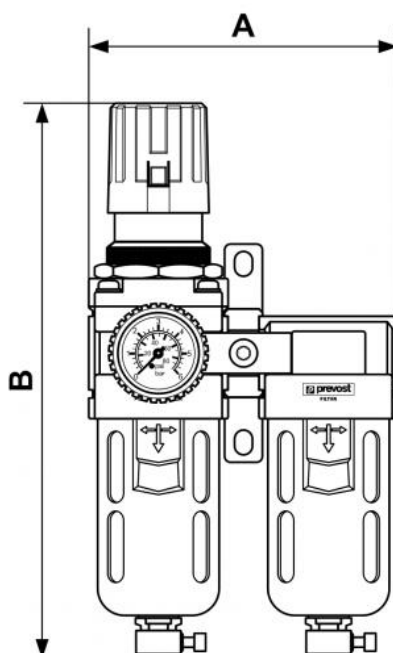

Dimensions

Reference	A mm	B mm
KTB CSM3BS	156	280
KTB CSM3ES	6.142	11.024
KTB CSM3IS	6.142	11.024