

ALTO 3 - Filter-Regulator (gauge included) with wall bracket



BSPP female thread

G 1/2

Flow rate (l/min at 7 bar ?P

1bar) = 3000

Max operating pressure (bar)

12

Filtration (µm)

25

Temperature

+5°C to +50 °C

Construction


Body : Aluminium
Polycarbonate bowl with
metallic protection

Equipped with

Manual drain

Description

Reference	BSPP female thread	Flow rate (l/min at 7 bar ?P	Max operating pressure (bar)	Filtration (µm)
KTM SM3	G 1/2	1bar) = 3000	12	25

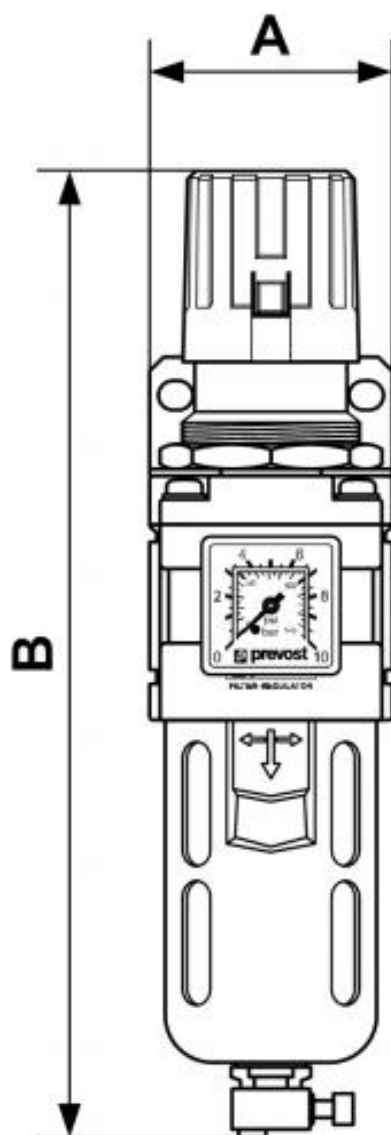

Dimensions		
Reference	A mm	B mm
KTM SM3	70	280