

## Thread swivel coupler



### BSPF female thread

G 3/8

### Profile

British

### Technology

"One push" safety system (avoids hose whip)

### Operating pressure

2 to 12 bar

### Flow rate at 6 bar

750 l/min (?P : 0,6 bar)

### ID Passage

6 mm

### Temperature

-15°C to +70°C

### Construction

Composite body

### Highlight

Anti-static Non scratch


### Description

#### Reference

**BSI 061102SW**

#### BSPF female thread

G 3/8

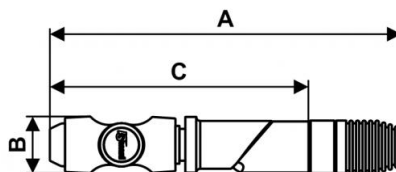

## Dimensions

Reference	A mm	B mm	C mm
<b>BSI 061102SW</b>	180	30	132.9