


Parallel male thread coupler



<p><u>BSPP male thread</u> G 1/4</p>	<p><u>Profile</u> British</p>	<p><u>Technology</u> "One push" safety system (avoids hose whip)</p>	<p><u>Operating pressure</u> 2 to 12 bar</p>
<p><u>Flow rate at 6 bar</u> 750 l/min (?P = 0,6 bar)</p>	<p><u>ID Passage</u> 6 mm</p>	<p><u>Temperature</u> -15°C to +70°C</p>	<p><u>Construction</u> Composite body</p>
<p><u>Highlight</u> Anti-static Non scratch</p>			

Description	
Reference	BSPP male thread
BSI 061151	G 1/4
BSI 061152	G 3/8
BSI 061153	G 1/2

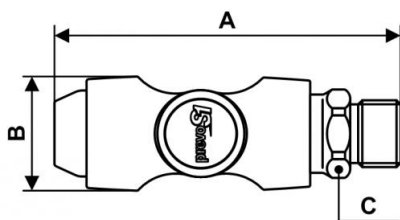

Dimensions

Reference	A mm	B mm	C mm
BSI 061151	83.9	30	20
BSI 061152	85.9	30	23
BSI 061153	89.9	30	26