


Parallel male thread coupler



| | | | |
|--|--|---|---|
| <p><u>BSPP male thread</u> G 1/4</p> | <p><u>Profile</u> British</p> | <p><u>Technology</u> "One push" safety system (avoids hose whip)</p> | <p><u>Operating pressure</u> 2 to 12 bar</p> |
| <p><u>Flow rate at 6 bar</u> 750 l/min (?P = 0,6 bar)</p> | <p><u>ID Passage</u> 6 mm</p> | <p><u>Temperature</u> -15°C to +70°C</p> | <p><u>Construction</u> Composite body</p> |
| <p><u>Highlight</u> Anti-static Non scratch</p> | | | |

| Description | |
|-------------------|------------------|
| Reference | BSPP male thread |
| BSI 061151 | G 1/4 |
| BSI 061152 | G 3/8 |
| BSI 061153 | G 1/2 |

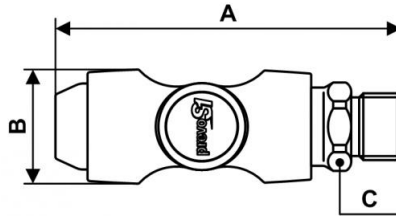

Dimensions

| Reference | A mm | B mm | C mm |
|-------------------|------|------|------|
| BSI 061151 | 83.9 | 30 | 20 |
| BSI 061152 | 85.9 | 30 | 23 |
| BSI 061153 | 89.9 | 30 | 26 |