

## Thread swivel coupler



### BSPP female thread

G 3/8

### Technology

"One push" safety system  
(avoids hose whip)

### Operating pressure

2 to 12 bar

### Flow rate at 6 bar

800 l/min ( $\Delta P = 0,6$  bar)

### ID Passage

6 mm

### Temperature

-15°C to +70°C

### Construction

Composite body

### Highlight

Anti-static Non scratch


## Description

Reference

BSPP female thread

**ASI 061102SW**

G 3/8

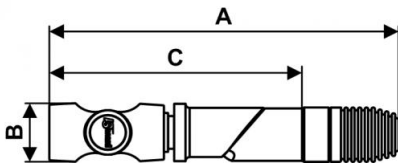

| Dimensions   |      |      |       |
|--------------|------|------|-------|
| Reference    | A mm | B mm | C mm  |
| ASI 061102SW | 172  | 30   | 125.3 |