

thread swivel coupler



NPT female thread

3/8" FNPT

Technology

"One push" safety system
(avoids hose whip)

Operating pressure

2 to 12 bar

Flow rate at 6 bar

2028 l/min (?P = 0,6 bar)

ID Passage

8 mm

Temperature

-15°C to +70°C

Construction

Composite body

Highlight

Anti-static Non scratch


Description

Reference

USI 081202SW

NPT female thread

3/8" FNPT

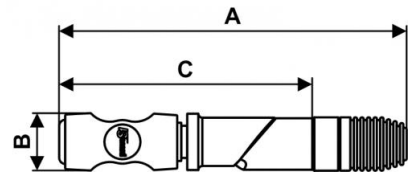

Dimensions			
Reference	A mm	B mm	C mm
USI 081202SW	184	33	139.2