


Filter-Regulator-Lubricator ALTO 4 with a non-lubricated outlet on a gantry



Profile ISO 6150 B	Inlet 1 adaptor IRP 11	Filtration (µm) 25	Outlet 3 couplings 2 x ISI 11EB 1 x ISI 06 (non lubricated outlet)
Flow rate (l/min at 6 bar ΔP : 0,6bar) 4160	Temperature +5°C to +50 °C	Construction Body : Aluminium Polycarbonate bowl with metallic protection	Highlight Easy to transport
Equipped with Coupler and adaptor			

Description					
Reference	Profile	Inlet 1 adaptor	Filtration (µm)	Outlet 3 couplings	Flow rate (l/min at 6 bar ΔP : 0,6bar)

PTE LIS	ISO 6150 B	IRP 11	25	2 x ISI 11EB 1 x ISI 06 (non lubricated outlet)	4160
PTE LCM11	ISO 6150 C	CRP 11	25	2x CSM 11 1x CSM 08 (non lubricated outlet)	4120

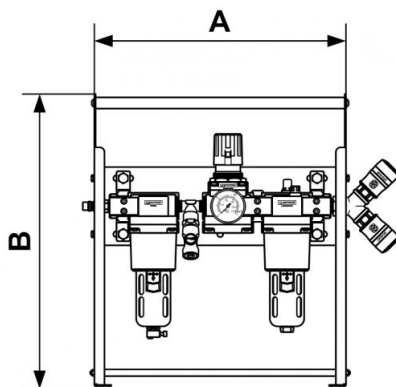

Dimensions

Reference	A mm	B mm
PTE LIS	17.638	20.575
PTE LCM11	448	522.6