


## Bulkhead coupler



<p><b><u>BSPF female thread</u></b></p> <p>G 1/4</p>	<p><b><u>Drill Ø (mm)</u></b></p> <p>27</p>	<p><b><u>Panel depth (mm)</u></b></p> <p>11</p>	<p><b><u>Technology</u></b></p> <p>"One push" safety system (avoids hose whip)</p>
<p><b><u>Operating pressure</u></b></p> <p>2 to 12 bar</p>	<p><b><u>Flow rate at 6 bar</u></b></p> <p>833 l/min (<math>\Delta P</math> : 0,6 bar)</p>	<p><b><u>ID Passage</u></b></p> <p>6 mm</p>	<p><b><u>Temperature</u></b></p> <p>-15°C to +70°C</p>
<p><b><u>Construction</u></b></p> <p>Composite body</p>	<p><b><u>Highlight</u></b></p> <p>Anti-static Non scratch</p>		

Description			
Reference	BSPF female thread	Drill Ø (mm)	Panel depth (mm)
<b>CSI 062101</b>	G 1/4	27	11

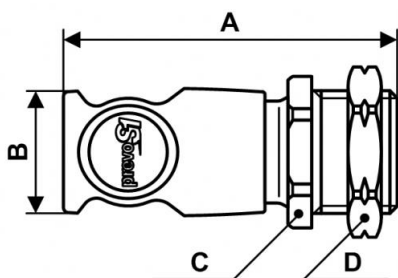

### Dimensions

Reference	A mm	B mm	C mm	D mm
<b>CSI 062101</b>	70.5	27	29	32