


Refrigeration dryers with By-pass hose and flexible hose



<u>Consumption (kw)</u> 0.24	<u>Inlet (by-pass)</u> R 1/2 M	<u>Outlet (by pass)</u> R 1/2 M	<u>Flow rate (m3/h)</u> 30
<u>Dryer for compressor of (CV)</u> 4	<u>Sound level (dB(A))</u> 45	<u>Operating pressure</u> 3 to 12 bar	<u>Temperature</u> +4,4°C to +43°C
<u>Supply voltage</u> 230 V - 50 HZ	<u>Dewpoint</u> + 3°C		

Description						
Reference	Consumption (kw)	Inlet (by-pass)	Outlet (by pass)	Flow rate (m3/h)	Dryer for compressor of (CV)	Sound level (dB(A))
ALF L30	0.24	R 1/2 M	R 1/2 M	30	4	45
ALF L60	0.41	R 3/4 M	R 3/4 M	60	7.5	51

Reference	Consumption (kw)	Inlet (by- pass)	Outlet (by pass)	Flow rate (m3/h)	Dryer for compressor of (CV)	Sound level (dB(A))
ALF L80	0.46	R 3/4 M	R 3/4 M	80	10	53
ALF L100	0.57	R 3/4 M	R 3/4 M	100	15	53
ALF L140	0.58	G 1 F	G 1 F	140	20	60

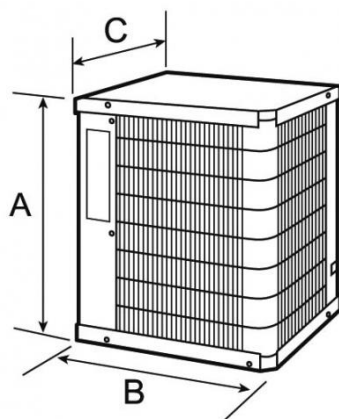

Dimensions			
Reference	A mm	B mm	C mm
ALF L30	381	320	320
ALF L60	569	368	368
ALF L80	569	368	368
ALF L100	569	500	500
ALF L140	601	363	861