

Parallel female thread twin coupler



BSP female thread

G 1/4

Technology

"One push" safety system (avoids hose whip)

Operating pressure

2 to 12 bar

Flow rate at 6 bar

800 l/min (?P : 0,6 bar)

ID Passage

6 mm

Temperature

-15°C to +70°C

Construction


Composite body

Highlight

Anti-static Non scratch

Description

Reference	BSP female thread
ASI 068101	G 1/4
ASI 068102	G 3/8
ASI 068103	G 1/2

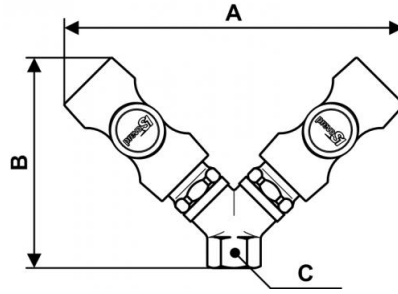

Dimensions

Reference	A mm	B mm	C mm
ASI 068101	134	82	17
ASI 068102	140	87	20
ASI 068103	150	95	25