


Hose tail coupler



<u>For hose ID (mm)</u> 9	<u>Profile</u> European 10,4 mm	<u>Technology</u> "One push" safety system (avoids hose whip)	<u>Operating pressure</u> 2 to 16 bar
<u>Flow rate at 6 bar</u> 3530 l/min ($\Delta P = 0,6$ bar)	<u>ID Passage</u> 10,4 mm	<u>Temperature</u> -15°C to +70°C	<u>Construction</u> Body : Stainless steel
<u>Highlight</u> Anti-static Excellent efficiency Harsh conditions			

Description	
Reference	For hose ID (mm)
ESI 111809	9
ESI 111810	10
ESI 111813	13

Reference	For hose ID (mm)
ESI 111816	16
ESI 111819	19

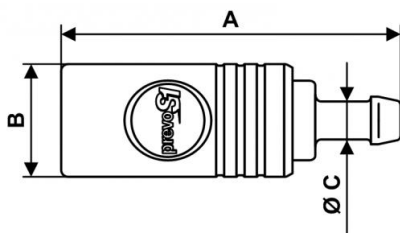

Dimensions

Reference	A mm	B mm	C mm
ESI 111809	127	37	9
ESI 111810	127.5	37	10
ESI 111813	111.4	37	12.5
ESI 111816	111.4	37	15.5
ESI 111819	152.5	37	18.5