

Parallel female thread coupler



NPT female thread

3/8" FNPT

Profile

Truflate

Technology

"One push" safety system
(avoids hose whip)

Operating pressure

2 to 16 bar

Flow rate at 6 bar

2987 l/min ($\Delta P = 0,6$ bar)

ID Passage

11 mm

Temperature

-15°C to +70°C

Construction

Stainless steel

Highlight

Anti-static Excellent
efficiency Harsh conditions

Description

Reference

NPT female thread

USI 111202


3/8" FNPT

USI 111203

1/2" FNPT

USI 111204

3/4" FNPT

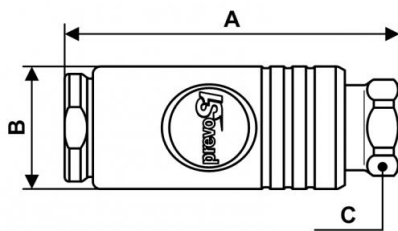

Dimensions

Reference	A mm	B mm	C mm
USI 111202	99.5	37	26
USI 111203	102	37	26
USI 111204	108	37	30