

Tee with tapered male centre leg - RPT CR



BSPT male thread

R 1/8

For tube OD (mm)

4

Operating pressure

0 to 10 bar

Temperature

0°C to + 60°C


Construction

Polymer and nickel-plated
brass

Description

Reference	BSPT male thread	For tube OD (mm)
RPT CR0400	R 1/8	4
RPT CR0401	R 1/4	4
RPT CR0500	R 1/8	5
RPT CR0501	R 1/4	5
RPT CR0502	R 3/8	5
RPT CR0503	R 1/2	5
RPT CR0600	R 1/8	6
RPT CR0601	R 1/4	6
RPT CR0602	R 3/8	6

Reference	BSPT male thread	For tube OD (mm)
RPT CR0603	R 1/2	6
RPT CR0800	R 1/8	8
RPT CR0801	R 1/4	8
RPT CR0802	R 3/8	8
RPT CR0803	R 1/2	8
RPT CR1000	R 1/8	10
RPT CR1001	R 1/4	10
RPT CR1002	R 3/8	10
RPT CR1003	R 1/2	10
RPT CR1201	R 1/4	12
RPT CR1202	R 3/8	12
RPT CR1203	R 1/2	12
RPT CR1402	R 3/8	14
RPT CR1403	R 1/2	14
RPT CR1602	R 3/8	16
RPT CR1603	R 1/2	16

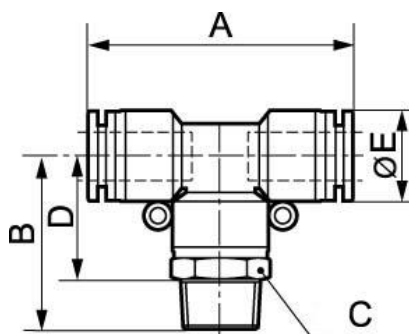

Dimensions					
Reference	A mm	B mm	C mm	D mm	E mm
RPT CR0400	35	25	10	17.5	10
RPT CR0401	35	26.5	14	17.5	10
RPT CR0500	41	27.5	12	20	12.8
RPT CR0501	41	29	14	20	12.8
RPT CR0502	41	31.5	17	20.5	12.8
RPT CR0503	41	34	21	21	12.8
RPT CR0600	41	27.5	12	20	12.8
RPT CR0601	41	29	14	20	12.8
RPT CR0602	41	31.5	17	20.5	12.8
RPT CR0603	41	34	21	21	12.8
RPT CR0800	45	29.5	14	22	13.8
RPT CR0801	45	31	14	22	13.8
RPT CR0802	45	33.5	17	22.5	13.8
RPT CR0803	45	36	21	23	13.8
RPT CR1000	52.6	33.2	17	25.7	16.8
RPT CR1001	52.6	34.7	17	25.7	16.8
RPT CR1002	52.6	36.7	17	25.7	16.8
RPT CR1003	52.6	39.2	21	26.2	16.8
RPT CR1201	55.6	35.5	19	26.5	19.8
RPT CR1202	55.6	38	19	27	19.8

Reference	A mm	B mm	C mm	D mm	E mm
RPT CR1203	55.6	40	21	27	19.8
RPT CR1402	62	41.2	22	30.2	22.7
RPT CR1403	62	43.2	22	30.2	22.7
RPT CR1602	64.6	43	24	32	23.8
RPT CR1603	64.6	45	24	32	23.8